



# Distributed Coverage Optimization Techniques for Improving Lifetime of Wireless Sensor Networks

PhD Dissertation Defense

Ali Kadhum IDREES


Under Supervision:

Raphaël COUTURIER, Karine DESCHINKEL & Michel SALOMON

University of Franche-Comté - FEMTO-ST - DISC Dept. - AND Team

1 October 2015

# Problem Definition, Solution, and Objectives

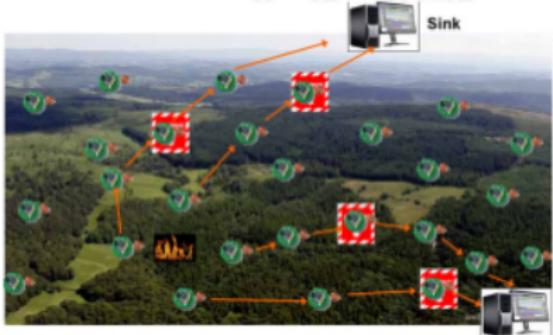

## MAIN QUESTION ?

How to reduce the redundancy while coverage preservation for prolong the network lifetime continuously and effectively when monitoring a certain area of interest ?



How How to minimize the energy consuption and extend the network lifetime during covering a certain area?

# Problem Definition, Solution, and Objectives

## OUR SOLUTION

The area of interest is divided into subregions using a divide-and conquer method and then combine two efficient techniques :


- Leader Election for each subregion.

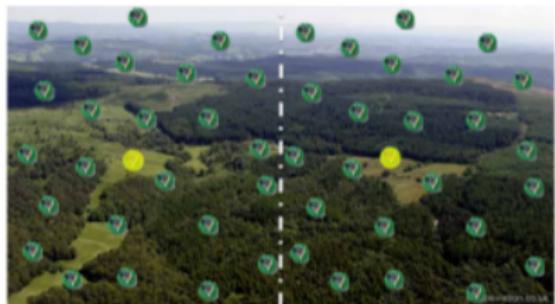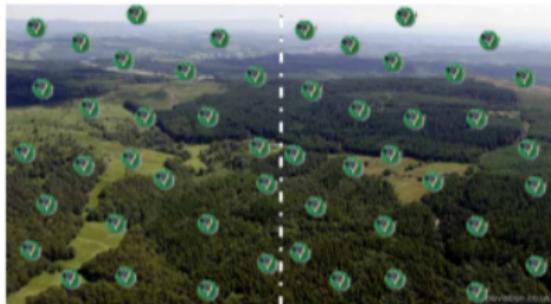

# Problem Definition, Solution, and Objectives

## OUR SOLUTION

- Activity Scheduling based optimization is planned for each subregion.

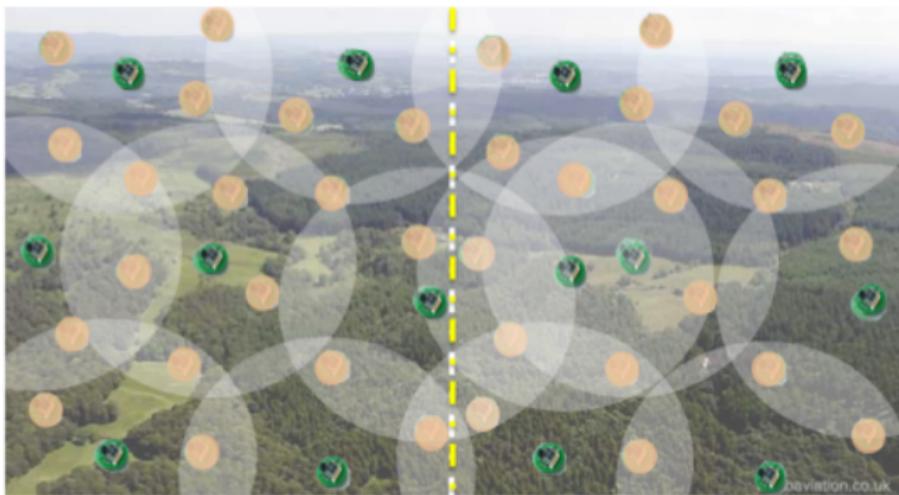

# Problem Definition, Solution, and Objectives

---

## Dissertation Objectives

Develop energy-efficient distributed optimization protocols that should be able to :

- Schedule node activities by optimize both coverage and lifetime.
- Combine two efficient techniques : leader election and sensor activity scheduling.
- Perform a distributed optimization process.

# Presentation Outline

---




# Presentation Outline

---



# Wireless Sensor Networks (WSNs)

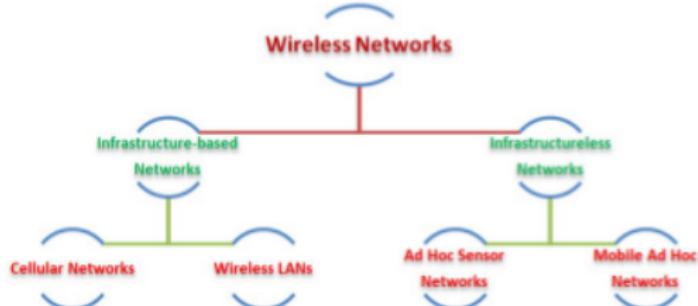

Architecture of WSNs




## Sensor


- Electronic Low-cost tiny device.
- Sense, process and transmit data.
- Limited energy, memory and processing capabilities.




# Types of Wireless Sensor Networks

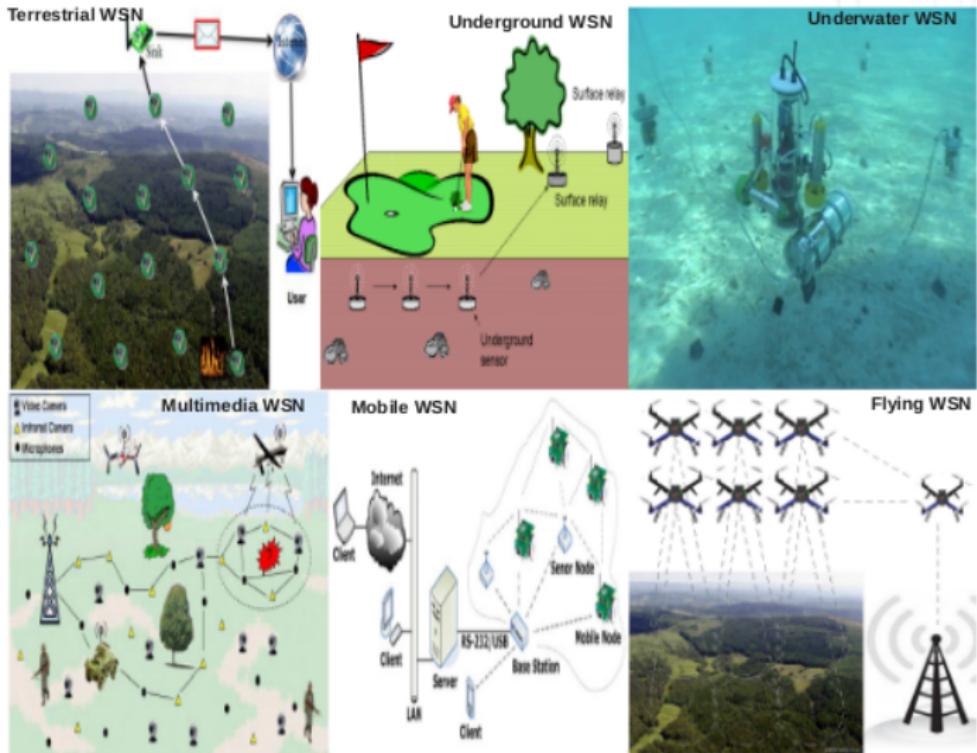

# Applications

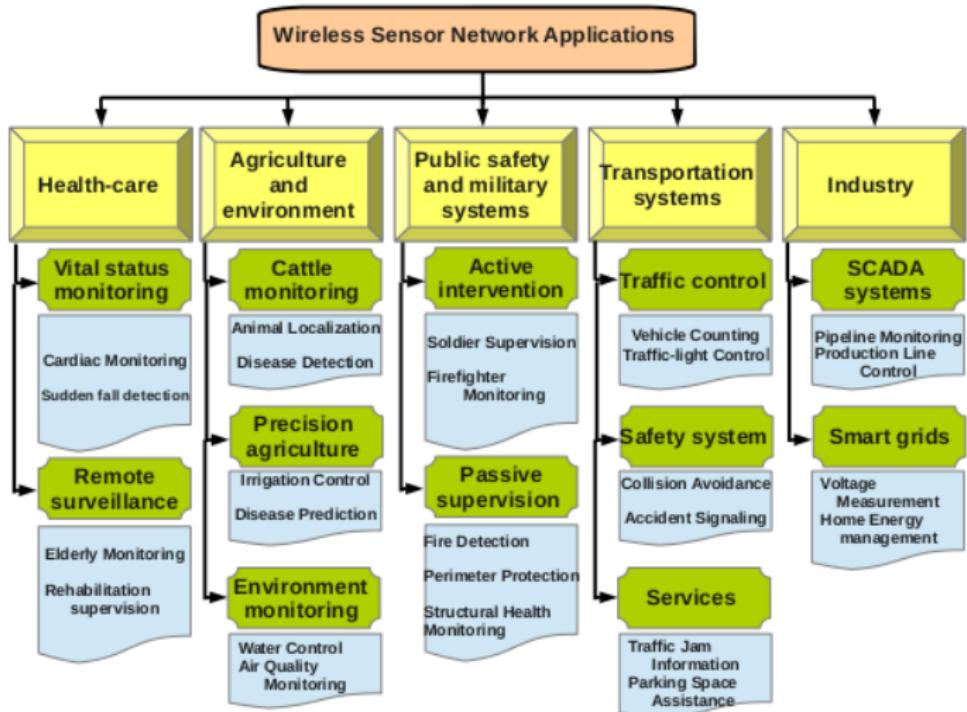

# Energy-Efficient Mechanisms of a working WSN

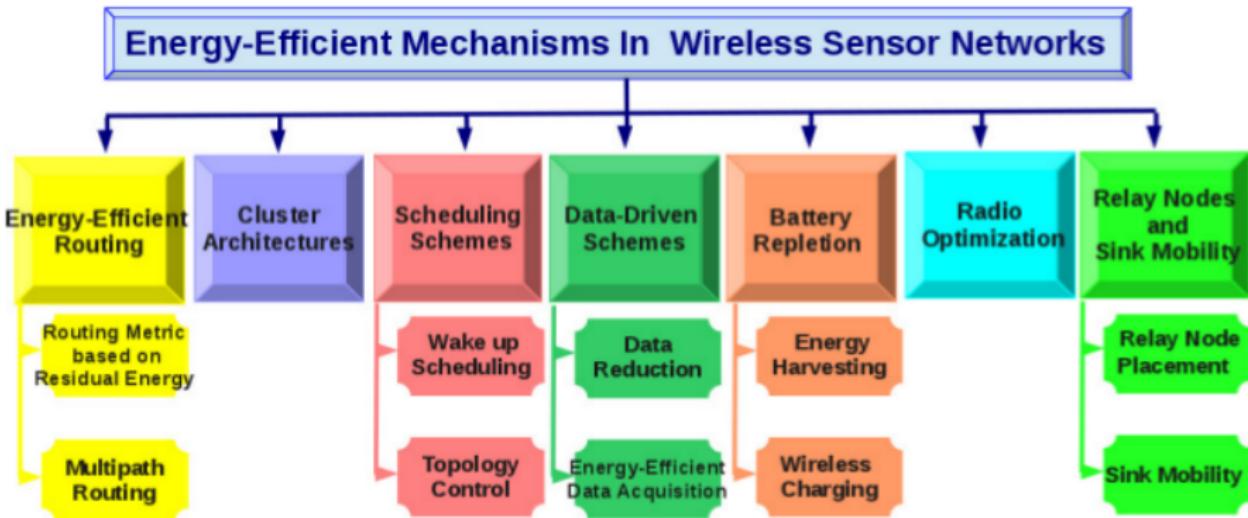

## Some network lifetime definitions :

- i) Time spent until death of the first sensor ( or cluster head ).
- ii) Time spent until death of all wireless sensor nodes in WSN.
- iii) Time spent by WSN in covering each target by at least one sensor.
- iv) Time during which the area of interest is covered by at least  $k$  nodes.
- v) Elapsed time until losing the connectivity or the coverage.

## Network lifetime In this dissertation :

Time elapsed until the coverage ratio becomes less than a predetermined threshold  $\alpha$ .

# Coverage in Wireless Sensor Networks

---



## Coverage Definition :

**Coverage** reflects how well a sensor field is monitored efficiently using as less energy as possible.

# Coverage in Wireless Sensor Networks

## Coverage Definition :

Coverage reflects how well a sensor field is monitored efficiently using as less energy as possible.

## Coverage Types :

1. **Area coverage** : every point inside an area has to be monitored.
2. **Target coverage** : is to cover only a finite number of discrete points called targets.
3. **Barrier coverage** : is to detect targets as they cross a barrier such as in intrusion detection and border surveillance applications.

# Coverage in Wireless Sensor Networks

## Coverage Definition :

Coverage reflects how well a sensor field is monitored efficiently using as less energy as possible.

## Coverage Types :

1. Area coverage : every point inside an area has to be monitored.
2. Target coverage : is to cover only a finite number of discrete points called targets.
3. Barrier coverage : ~~is to detect~~ detection of targets as they cross a barrier such as in intrusion detection and border surveillance applications.

## Coverage type in this dissertation :

The work presented in this dissertation deals with **area coverage**.

mettre en rouge

# Existing Works



## Coverage Approaches :

Most existing coverage approaches in literature classified into

### A) Full centralized coverage algorithms.

- Optimal or near optimal solution.
- low computation power for the sensors (except for base station).
- High communication overhead. ?
- Not scalable for large WSNs. :

### B) Full distributed coverage algorithms.

- Lower quality solution. ?
- High communication overhead ~~especially for dense WSNs~~
- Reliable and scalable for large WSNs.

## Coverage protocols in this dissertation :

The protocols presented in this dissertation combine between the two above approaches.

# Presentation Outline


---




## DiLCO Protocol ► Assumptions and Network Model :

- \* Static Wireless Sensors.
- \* Uniform deployment.
- \* High density deployment.
- \* Homogeneous in terms of :
  - Sensing, Communication, and Processing capabilities
- \* Heterogeneous Energy.
- \* ~~Its~~  $R_c \geq 2R_s$ . explain why this assumption
- \* Multi-hop communication.
- \* ~~Know Its~~ location by : known
  - Embedded GPS or
  - Location Discovery Algorithm.

### Primary point coverage model

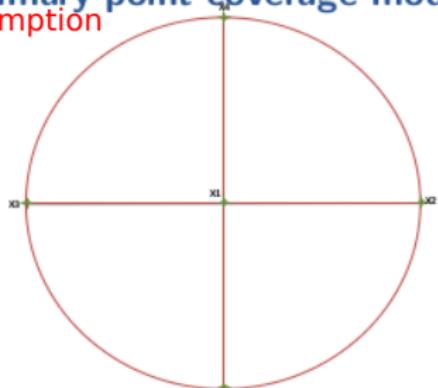

## DiLCO Protocol ► Main Idea

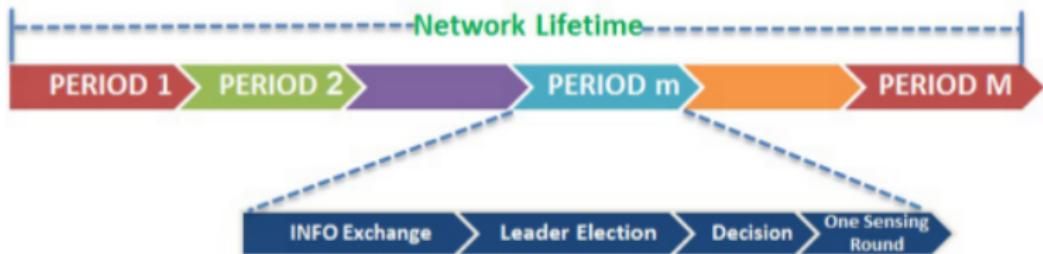

### 1. INFORMATION EXCHANGE :

Sensors exchanges through multi-hop communication, their :

- Position coordinates,
- current remaining energy,
- sensor node ID, and
- number of its one-hop live neighbors.



### 2. LEADER ELECTION :

The selection criteria are, in order of importance :

- larger number of neighbors,
- larger remaining energy, and then in case of equality,
- larger ID.

### 3. DECISION :

Leader solves an integer program(see next slide) to :

espace

- Select which sensors will be activated in the sensing phase.
- Send Active-Sleep packet to each sensor in the subregion.

### 4. SENSING :

Based on Active-Sleep Packet Information :

- Active sensors will execute their sensing task.
- Sleep sensors will wait a time equal to the period of sensing to wakeup.


## DiLCO Protocol ► Coverage Problem Formulation

~~Our coverage optimization problem can then be formulated as follows :~~

$$\left\{ \begin{array}{ll} \min \sum_{p \in P} (w_\theta \Theta_p + w_U U_p) \\ \text{subject to :} \\ \sum_{j \in J} \alpha_{jp} X_j - \Theta_p + U_p = 1, & \forall p \in P \\ \Theta_p \in \mathbb{N}, & \forall p \in P \\ U_p \in \{0, 1\}, & \forall p \in P \\ X_j \in \{0, 1\}, & \forall j \in J \end{array} \right.$$

- $X_j$  : indicates whether or not the sensor  $j$  is actively sensing (1 if yes and 0 if not) ;
- $\Theta_p$  : *overcoverage*, the number of sensors minus one that are covering the primary point  $p$  ;
- $U_p$  : *undercoverage*, indicates whether or not the primary point  $p$  is being covered (1 if not covered and 0 if covered).

## DiLCO Protocol ► DiLCO Protocol Algorithm

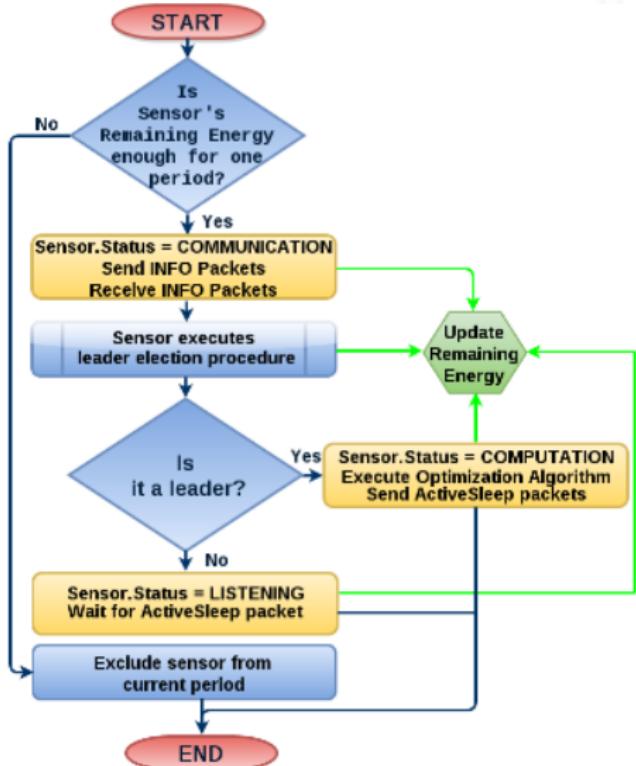

## DilCO Protocol ▶ Simulation Framework

TABLE: Relevant parameters for ~~network initializing~~ simulation.

Parameter	Value
Sensing Field	$(50 \times 25) \text{ m}^2$
Nodes Number	50, 100, 150, 200 and 250 nodes
Initial Energy	500-700 joules
Sensing Period	60 Minutes
$E_{th}$	36 Joules
$R_s$	5 m
$R_c$	10 m
$w_\Theta$	1
$w_U$	$ P ^2$
Modeling Language	A Mathematical Programming Language (AMPL)
Optimization Solver	GNU linear Programming Kit (GLPK)
Network Simulator	Discrete Event Simulator OMNeT++




## Energy Consumption Model

Sensor status	MCU	Radio	Sensing	Power (mW)
LISTENING	On	On	On	20.05
ACTIVE	On	Off	On	9.72
SLEEP	Off	Off	Off	0.02
COMPUTATION	On	On	On	26.83
Energy needed to send or receive a 2-bit content message				0.515

## Performance Metrics

- ↪ Network Lifetime
- ↪ Coverage Ratio (CR)
- ↪ Energy Consumption
- ↪ Number of Active Sensors Ratio (ASR)
- ↪ Execution Time

mettre les courbes qui suivent dans le même ordre

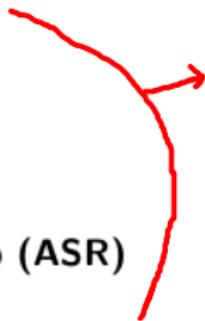

## DiLCO Protocol ▶ Performance Comparison

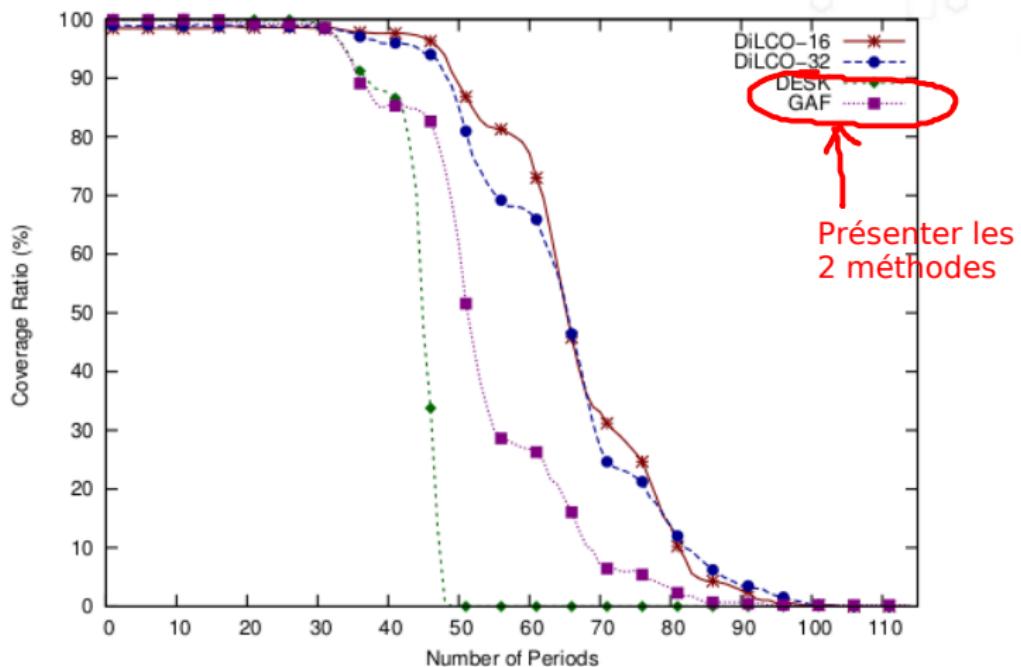


FIGURE: Coverage ratio for 150 deployed nodes

## DiLCO Protocol ▶ Performance Comparison



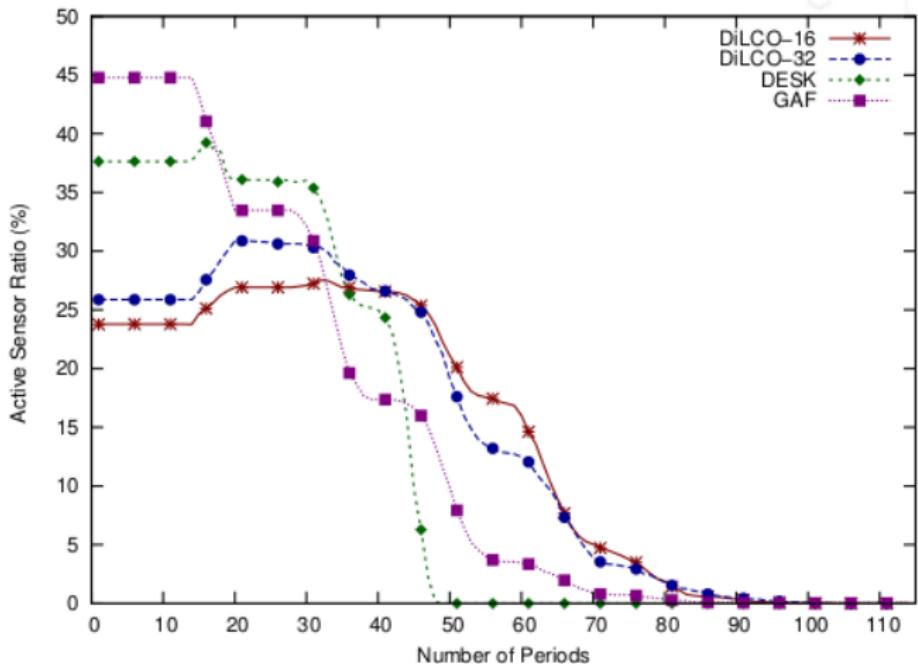


FIGURE: Active sensors ratio for 150 deployed nodes

## DilCO Protocol ▶ Performance Comparison

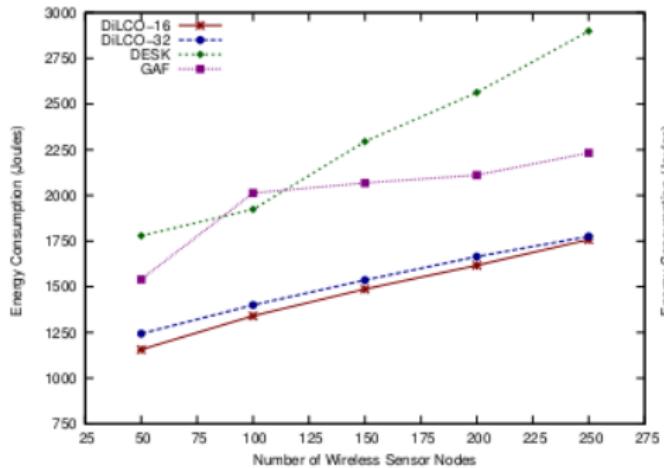


(a)

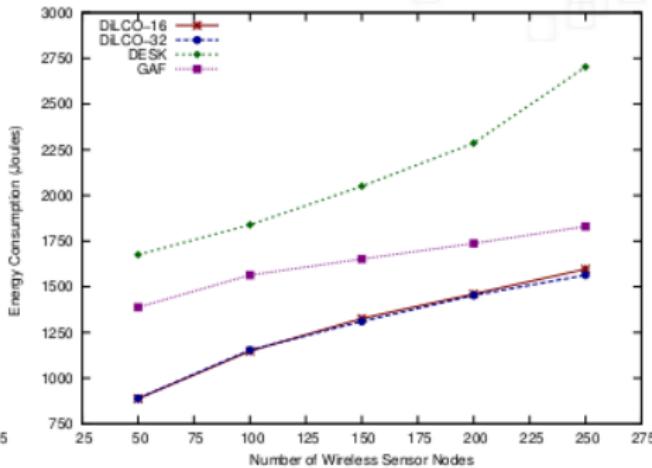


(b)

FIGURE: Energy consumption for (a)  $Lifetime_{95}$  and (b)  $Lifetime_{50}$

## DilCO Protocol ▶ Performance Comparison

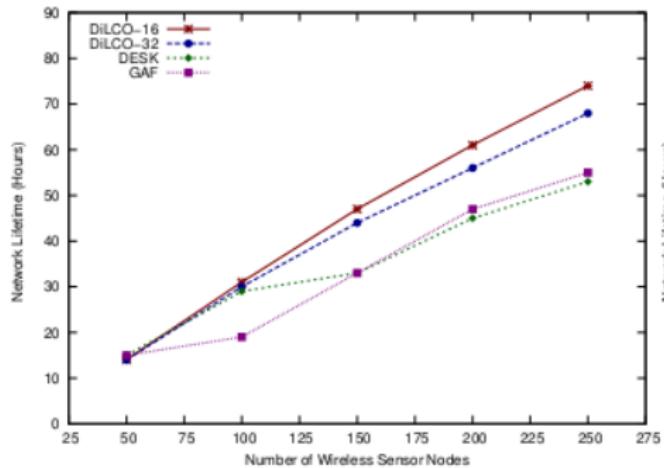

(a)

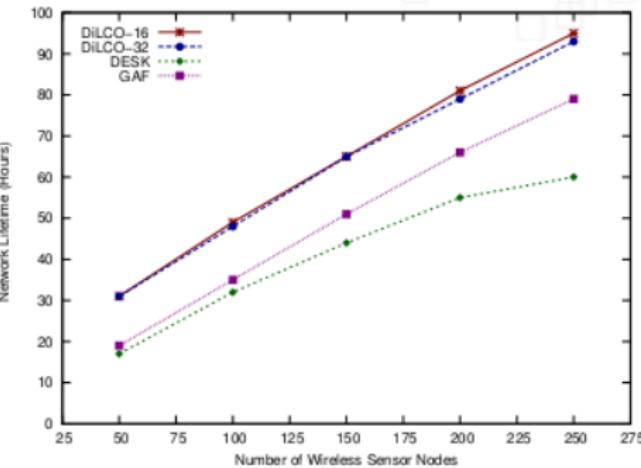

(b)

FIGURE: Network lifetime for (a)  $Lifetime_{95}$  and (b)  $Lifetime_{50}$

# Presentation Outline

---



## MuDiLCO Protocol ▶ Main Idea Idea

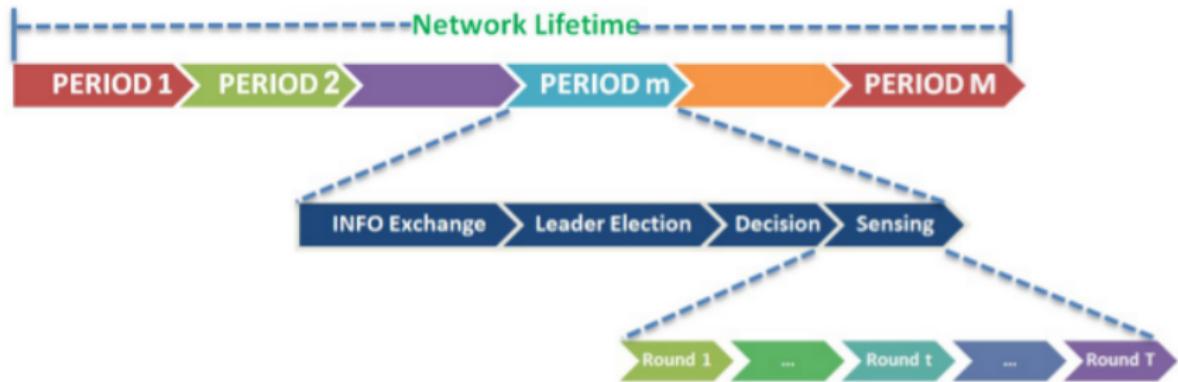


FIGURE: MuDiLCO protocol.

## MuDiLCO Protocol ► Multiround Coverage Problem Formulation

~~Our coverage optimization problem can then be formulated as follows~~

$$\min \sum_{t=1}^T \sum_{p=1}^P (W_\theta * \Theta_{t,p} + W_U * U_{t,p})$$

Subject to

coverage constraint  $\sum_{j=1}^{|J|} c_{j,p} * X_{t,j} = \Theta_{t,p} - U_{t,p} + 1 \quad \forall p \in P, t = 1, \dots, T$


energy constraint  $\sum_{t=1}^T X_{t,j} \leq \lfloor RE_j / E_{th} \rfloor \quad \forall j \in J, t = 1, \dots, T$

$$X_{t,j} \in \{0, 1\}, \quad \forall j \in J, t = 1, \dots, T$$

$$U_{t,p} \in \{0, 1\}, \quad \forall p \in P, t = 1, \dots, T$$

$$\Theta_{t,p} \geq 0 \quad \forall p \in P, t = 1, \dots, T$$

## MuDiLCO Protocol ► MuDiLCO Protocol Algorithm

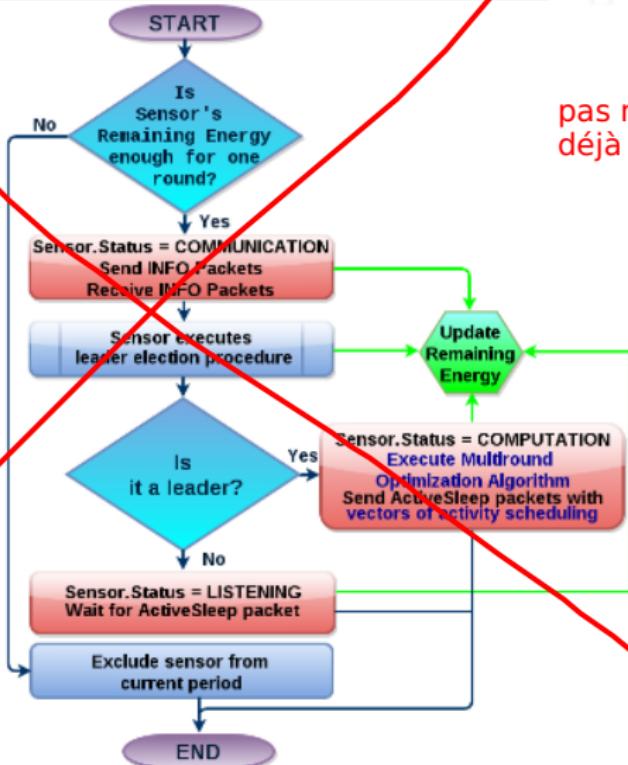

pas nécessaire  
déjà vu en slide 20

## MuDiLCO Protocol ▶ Results Analysis and Comparison

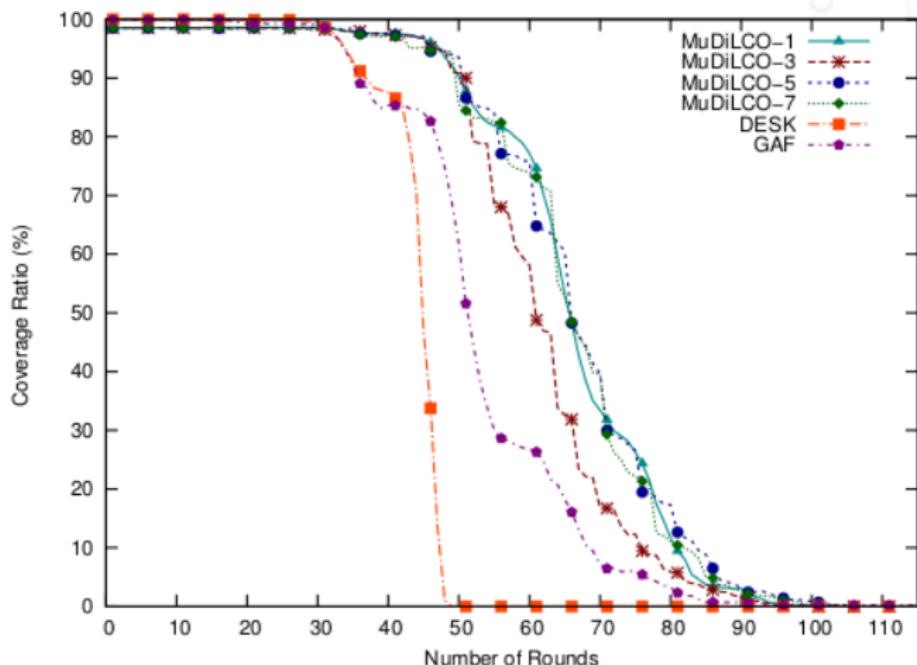


FIGURE: Average coverage ratio for 150 deployed nodes

## MuDiLCO Protocol ▶ Results Analysis and Comparison

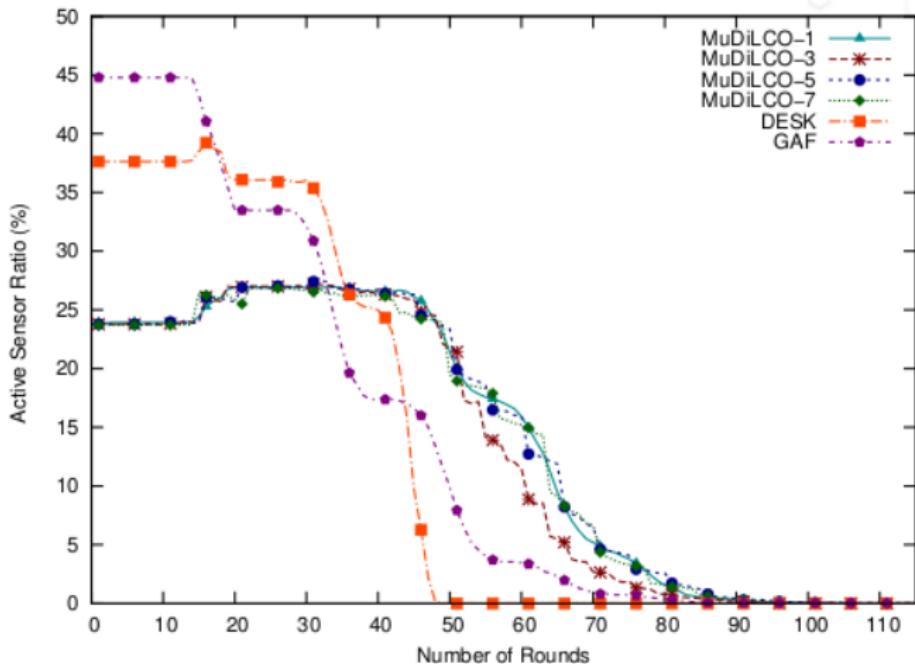


FIGURE: Active sensors ratio for 150 deployed nodes

## MuDiLCO Protocol ▶ Results Analysis and Comparison



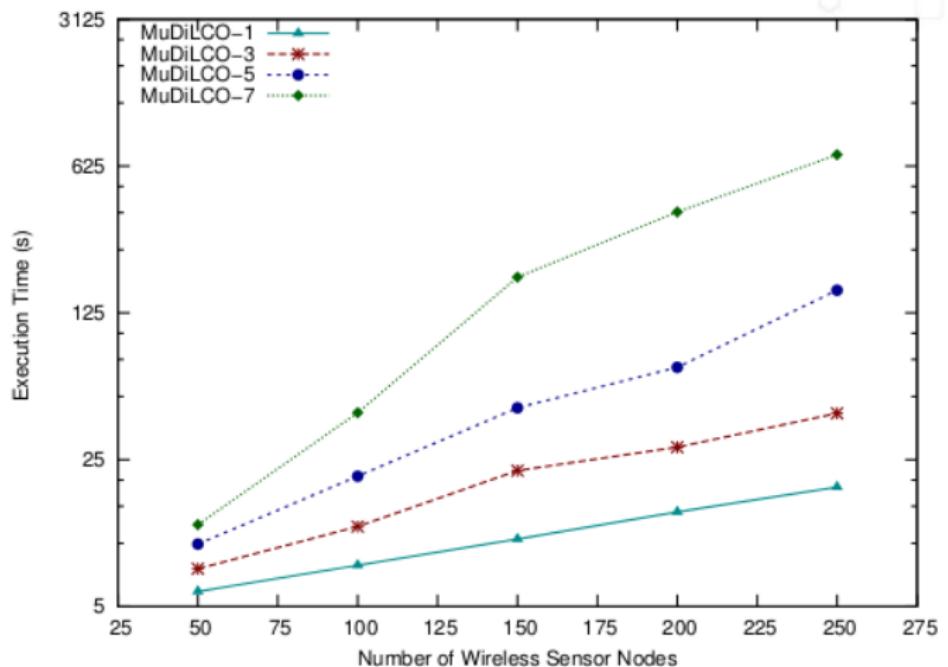


FIGURE: Execution Time (in seconds)

## MuDiLCO Protocol ▶ Results Analysis and Comparison

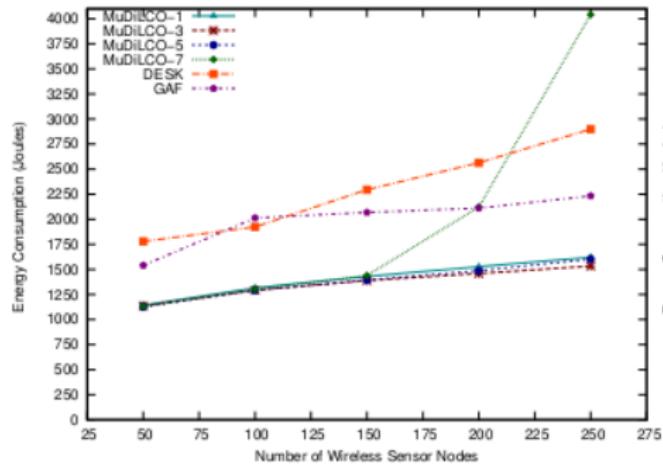


(a)

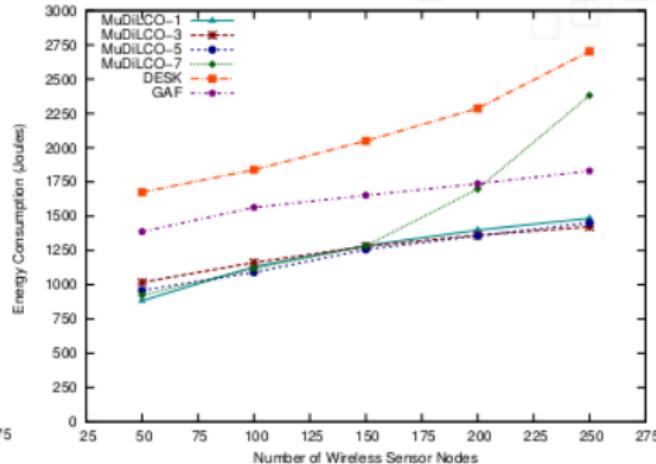


(b)

FIGURE: Energy consumption for (a)  $Lifetime_{95}$  and (b)  $Lifetime_{50}$

## MuDiLCO Protocol ► Results Analysis and Comparison

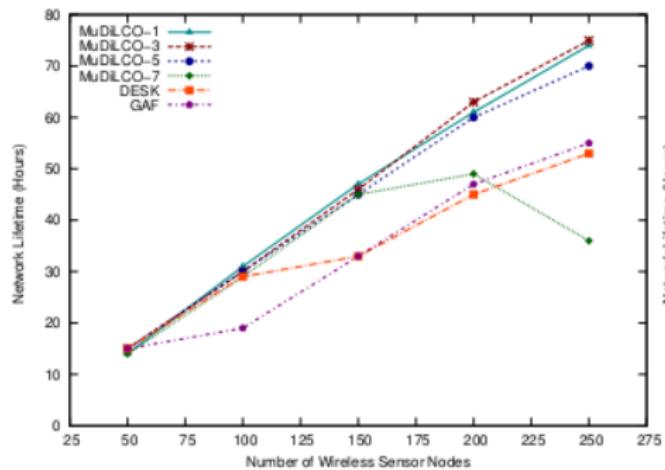

(a)

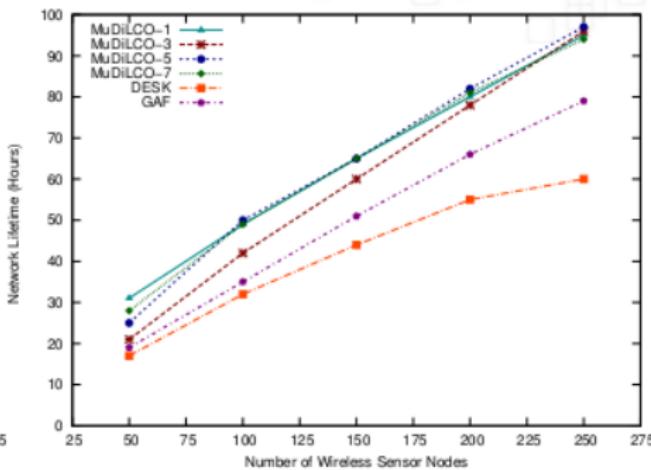

(b)


FIGURE: Network lifetime for (a)  $Lifetime_{95}$  and (b)  $Lifetime_{50}$

# Presentation Outline

---




## PeCO Protocol ▶ Assumptions and Models

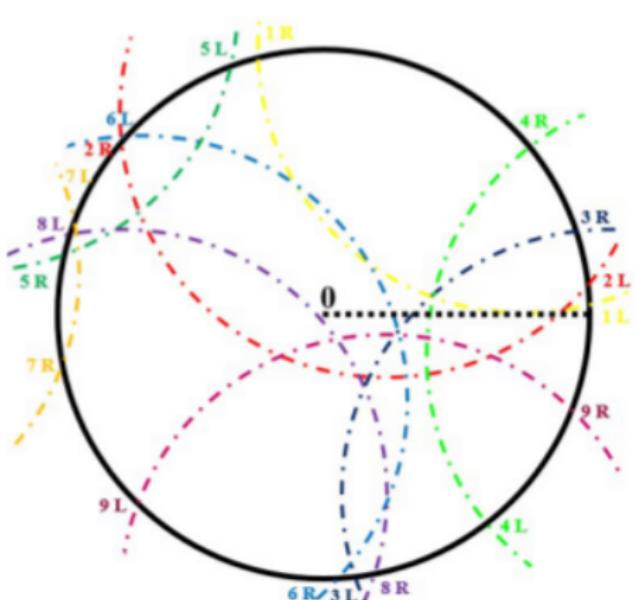

(a)

$$\alpha = \arccos \left( \frac{Dist(u, v)}{2R_s} \right).$$

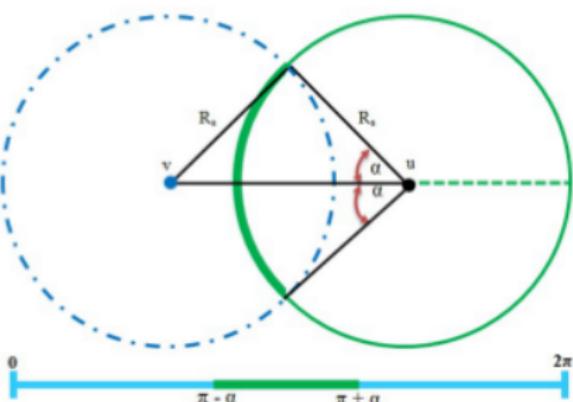


(b)

FIGURE: (a) Perimeter coverage of sensor node 0 and (b) finding the arc of  $u$ 's perimeter covered by  $v$ .

## PeCO Protocol ▶ Assumptions and Models

Table 6.1: Coverage intervals and contributing sensors for sensor node 0

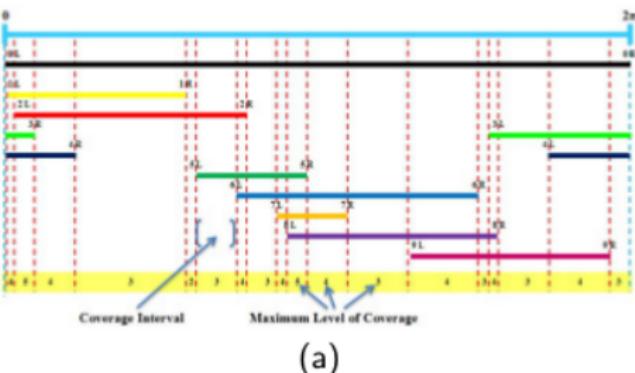

(a)


Left point angle $\alpha$	Interval left point	Interval right point	Maximum coverage level	Set of sensors involved in coverage interval				
0.0291	1L	2L	4	0	1	3	4	
0.104	2L	3R	5	0	1	3	4	2
0.3168	3R	4R	4	0	1	4	2	
0.6752	4R	1R	3	0	1	2		
1.8127	1R	5L	2	0	2			
1.9228	5L	6L	3	0	2	5		
2.3959	6L	2R	4	0	2	5	6	
2.4258	2R	7L	3	0	5	6		
2.7868	7L	8L	4	0	5	6	7	
2.8358	8L	5R	5	0	5	6	7	8
2.9184	5R	7R	4	0	6	7	8	
3.3301	7R	9R	3	0	6	8		
3.9464	9R	6R	4	0	6	8	9	
4.767	6R	3L	3	0	8	9		
4.8425	3L	8R	4	0	3	8	9	
4.9072	8R	4L	3	0	3	9		
5.3804	4L	9R	4	0	3	4	9	
5.9157	9R	1L	3	0	3	4		

(b)

FIGURE: (a) Maximum coverage levels for perimeter of sensor node 0. and (b) Coverage intervals and contributing sensors for sensor node 0.

## PeCO Protocol ▶ PeCO Protocol Algorithm

A voir,  
me semble un peu  
compliqué

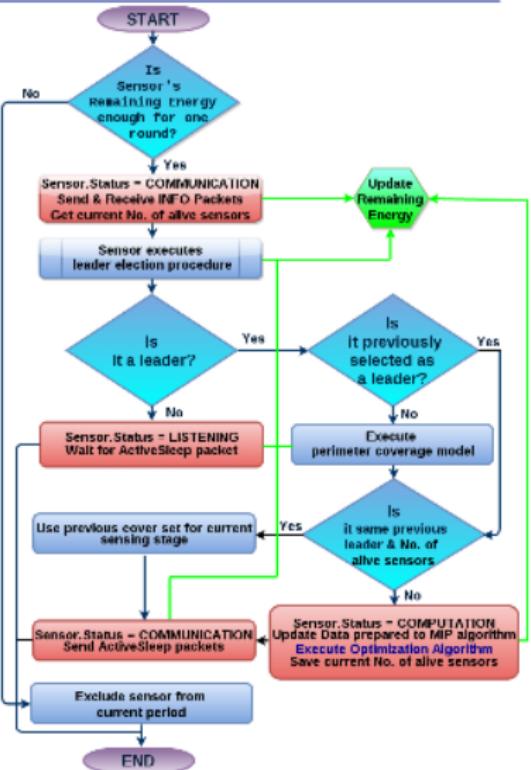

## PeCO Protocol ▶ Perimeter-based Coverage Problem Formulation

$$\text{Minimize} \sum_{j \in S} \sum_{i \in I_j} (\alpha_i^j M_i^j + \beta_i^j V_i^j)$$

measure of undercoverage desired level of coverage

Subject to :

number of active sensors  
in the coverage interval i for  
sensor j

$$\sum_{k \in A} (a_{ik}^j X_k) + M_i^j \geq l \quad \forall i \in I_j, \forall j \in S$$

$$\sum_{k \in A} (a_{ik}^j X_k) - V_i^j \leq l \quad \forall i \in I_j, \forall j \in S$$

$$X_k \in \{0, 1\}, \forall k \in A$$

$$M_i^j, V_i^j \in \mathbb{R}^+$$

measure of overcoverage

$S$  represents the set of sensor nodes ;

$A \subseteq S$  is the subset of alive sensors ;

$I_j$  designates the set of coverage intervals (CI) obtained for sensor  $j$  ;

$a_{ik}^j$  is indicator function of whether sensor  $k$  is involved in coverage interval  $i$  of sensor  $j$  ;

$\alpha_i^j$  and  $\beta_i^j$  are nonnegative weights ;

~~l is the level of coverage required for one sensor~~

~~l~~ the number of active sensors for covering the coverage interval  $i$  ;

If the sensor  $j$  is undercovered  $\Rightarrow M_i^j = l - l^i$ ,  $V_i^j = 0$  ;

If the sensor  $j$  is overcovered  $\Rightarrow M_i^j = 0$ ,  $V_i^j = l^i - l$ .

## PeCO Protocol ▶ Performance Evaluation and Analysis

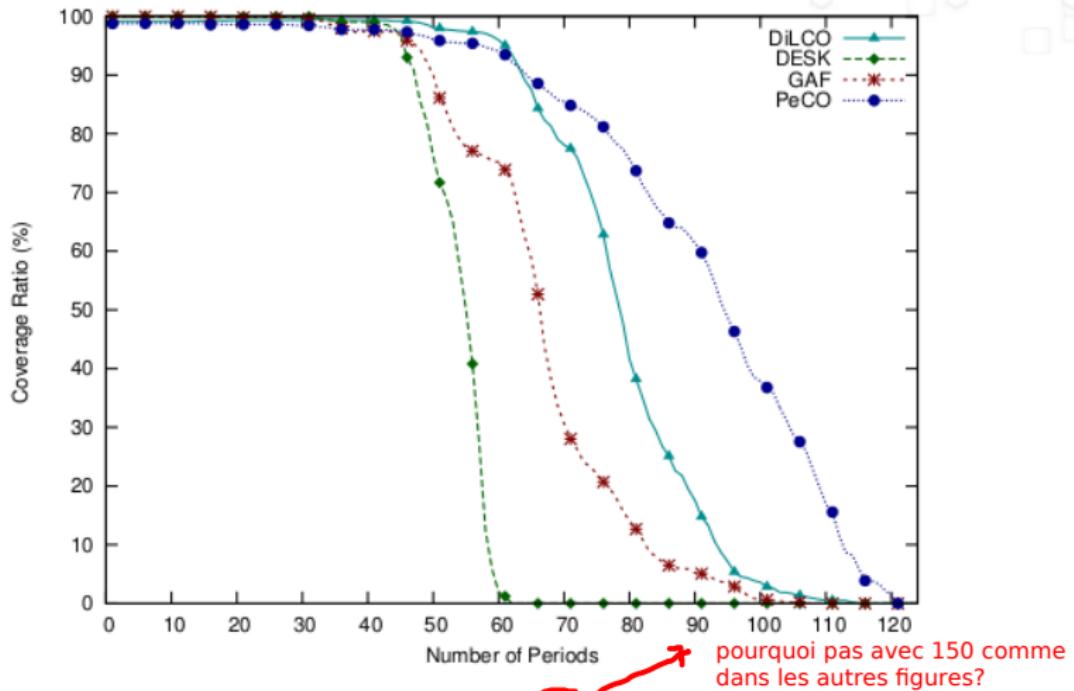


FIGURE: Coverage ratio for 200 deployed nodes.

## PeCO Protocol ▶ Performance Evaluation and Analysis



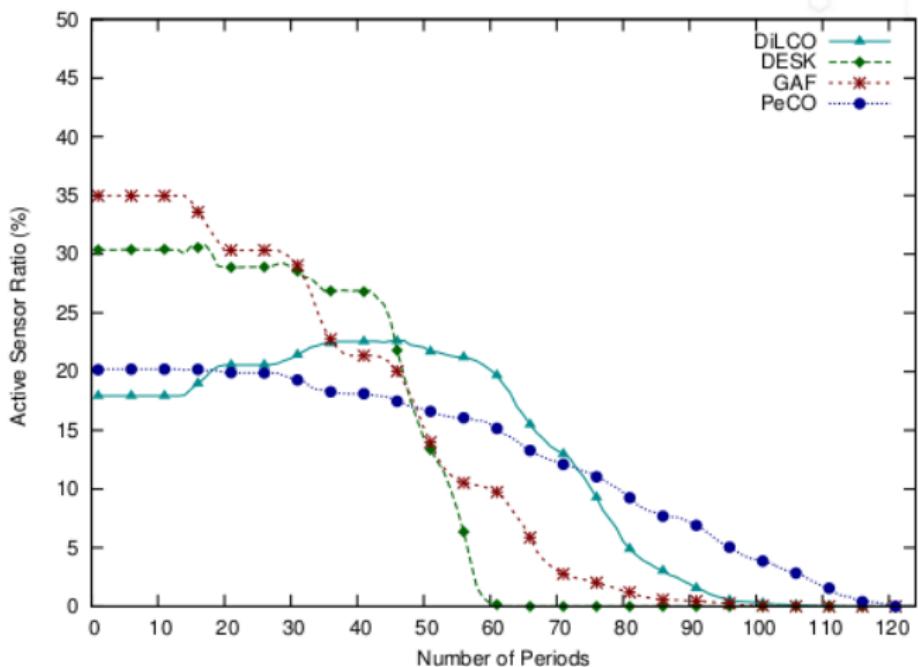


FIGURE: Active sensors ratio for 200 deployed nodes.

## PeCO Protocol ▶ Performance Evaluation and Analysis

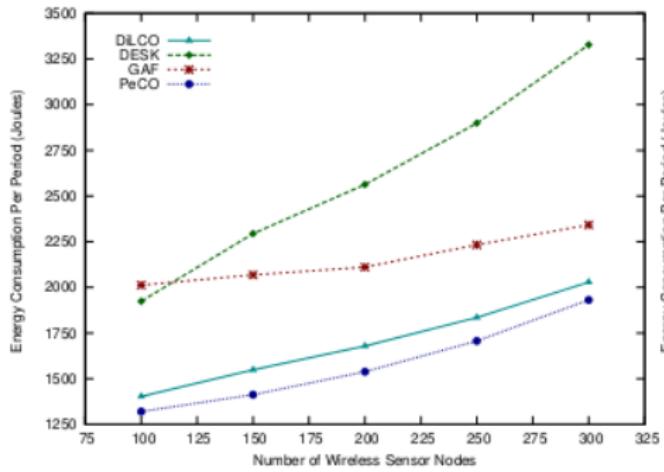


(a)

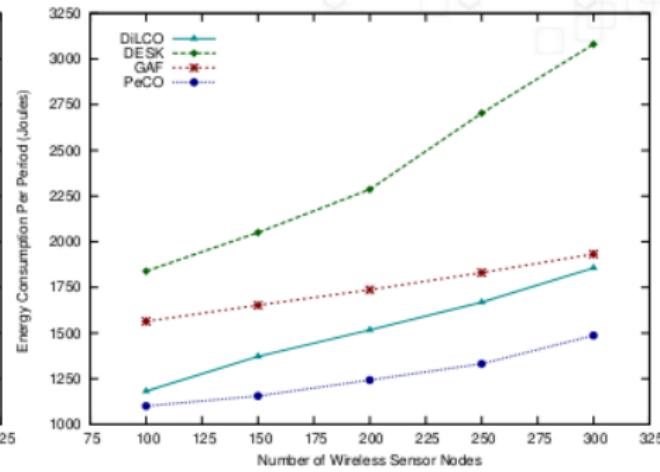


(b)

FIGURE: Energy consumption per period for (a)  $Lifetime_{95}$  and (b)  $Lifetime_{50}$ .

## PeCO Protocol ▶ Performance Evaluation and Analysis

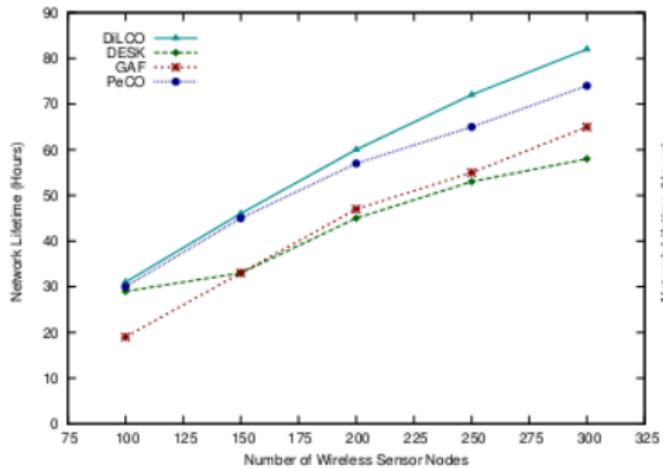

(a)

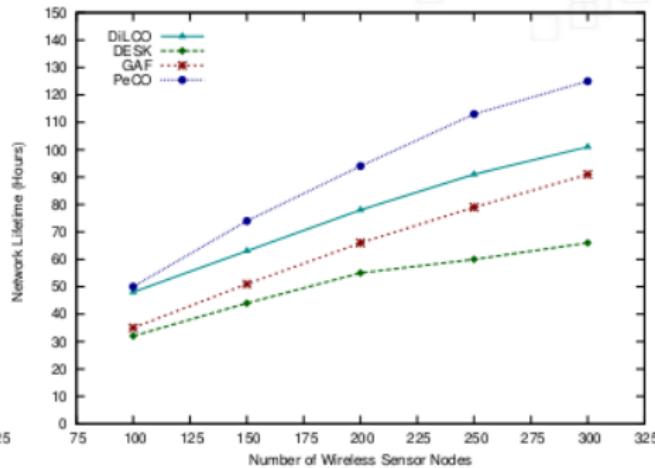

(b)

FIGURE: Network Lifetime for (a)  $Lifetime_{95}$  and (b)  $Lifetime_{50}$ .

# Presentation Outline

---



# Conclusion



- ▶ Two-step approaches are proposed to optimize both coverage and lifetime performances, where :
  - Sensing field is divided into smaller subregions using divide-and-conquer method.
  - One of the proposed optimization protocols is applied in each subregion in a distributed parallel way.
- ▶ The proposed protocols (DiLCO, MuDiLCO, PeCO) combine two efficient mechanisms :
  - Network leader election, and
  - Sensor activity scheduling based optimization.
- ▶ Our protocols are periodic where each period consists of 4 phases :
  - Information exchange,
  - Network leader election,
  - Decision based optimization, and
  - Sensing.

# Conclusion

---



- ▶ DiLCO and PeCO provide a schedule for one round per period.
- ▶ MuDiLCO provides a schedule for multiple rounds per period.
- ▶ Comparison results show that DiLCO, MuDiLCO, and PeCO protocols :
  - maintain the coverage for a larger number of rounds.
  - use less active nodes to save energy efficiently during sensing.
  - are more powerful against network disconnections.
  - perform the optimization with suitable execution times.
  - consume less energy.
  - prolong the network lifetime.

# Perspectives



## Investigate

- ▶ The optimal number of subregions ~~will be investigated~~.
- ▶ Design a heterogeneous integrated optimization protocol to integrate coverage, routing, and data aggregation protocols.
- ▶ Extend PeCO protocol so that the schedules are planned for multiple sensing periods.
- ▶ ~~We plan to~~ consider particle swarm optimization or evolutionary algorithms to obtain quickly near optimal solutions.
- ▶ Improve our mathematical models to take into account heterogeneous sensors from both energy and node characteristics point of views.
- ▶ ~~The cluster head will be selected in a distributed way and based on local information.~~ ?



Thank You for Your Attention !

Questions ?